

Radial Lead Resettable Polymer PTCs


SC30-075CW0D

Features

- RoHS Compliant and Halogen-Free
- Radial leaded Devices
- Cured, flame retardant epoxy polymer insulating material meets UL94V-0 requirements
- Operation Current: 0.75A, Maximum Voltage: 30Vdc, Operating Temperature: -40°C to +85°C

Applications

- USB hubs, ports and peripherals
- Power ports
- IEEE1394 ports
- Motor protection
- Automotive application
- Computers and peripherals
- General electronics

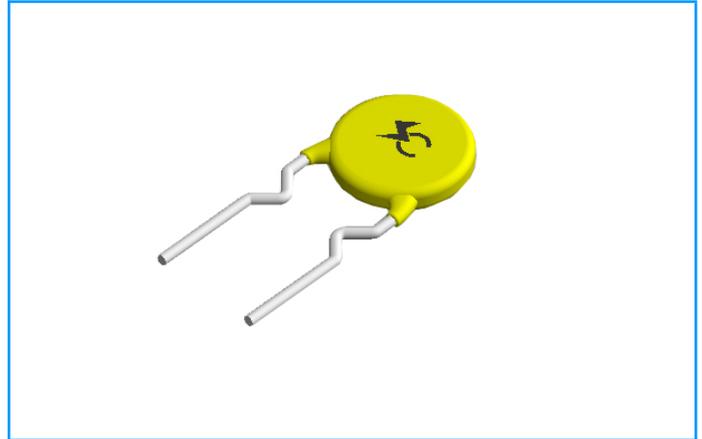

Electrical Parameters

Part Number	I_{hold} (A)	I_{trip} (A)	V_{max} (Vdc)	I_{max} (A)	P_{dtyp} (W)	Maximum Time To Trip		Resistance		
						Current (A)	Time (S)	R_{min} (Ω)	R_{max} (Ω)	$R1_{max}$ (Ω)
SC30-075CW0D	0.75	1.50	30	40	0.8	3.75	20.0	0.14	0.20	0.30

I_{hold} = Hold current: maximum current at which the device will not trip at 25°C still air.

I_{trip} = Trip current: minimum current at which the device will always trip at 25°C still air.

V_{max} = Maximum voltage device can withstand without damage at rated current.

I_{max} = Maximum fault current device can withstand without damage at rated voltage.

T_{trip} = Maximum time to trip(s) at assigned current.

P_{dtyp} = Typical power dissipation: typical amount of power dissipated by the device when in state air environment.

R_{min} = Minimum device resistance at 25°C prior to tripping.

R_{max} = Maximum device resistance at 25°C prior to tripping.


$R1_{max}$ = Maximum resistance of device at 25°C measured one hour after tripping.

Caution: Operation beyond the specified rating may result in damage and possible arcing and flame.

Radial Lead Resettable Polymer PTCs

SC30-075CW0D


Environmental Temperature and I_H , I_T

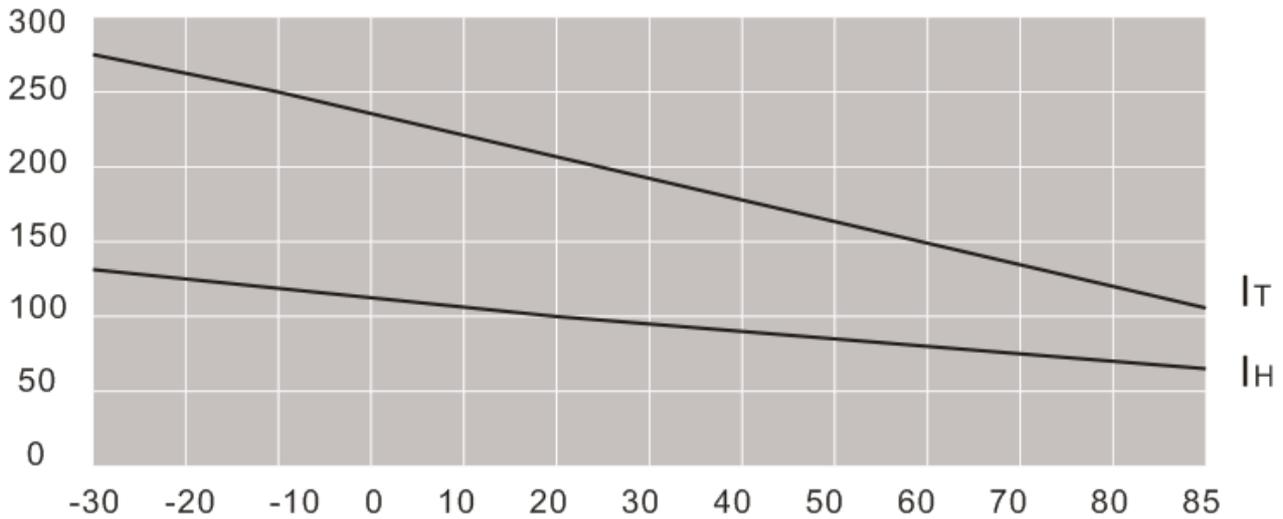

Test Procedures and Requirement

Test	Test Conditions	Accept/Reject Criteria
Resistance	In still air @ $25 \pm 2^\circ\text{C}$	$R_{\min} \leq R \leq R_{\max}$
Hold Current	60 min, at I_{hold} , In still air @ $25 \pm 2^\circ\text{C}$	No trip
Time to Trip	Specified current, V_{\max} , @ $25 \pm 2^\circ\text{C}$	$T \leq \text{Maximum Time To Trip}$
Trip Cycle Life	V_{\max} , I_{\max} , 100 cycles	No arcing or burning
Trip Endurance	V_{\max} , 24 hours	No arcing or burning

Soldering Parameters

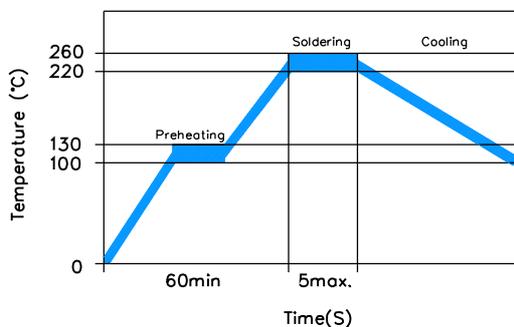

Pre-Heating Zone	Refer to the condition recommended by the manufacturer. Max. ramping rate should not exceed $4^\circ\text{C}/\text{Sec}$
Soldering Zone	Max. solder temperature should not exceed 260°C
Cooling Zone	Cooling by natural convection in air


Radial Lead Resettable Polymer PTCs

SC30-075CW0D

Physical Specifications

Lead Material	0.03-1.85A Tin-plated Copper clad steel 2.50-5.00A Tin-plated Copper
Soldering Characteristics	Solder ability per MIL-STD-202, Method 208E
Insulating Material	Cured, flame retardant epoxy polymer meets UL 94V-0 requirements.
Device Labeling	Marked with 'SC', voltage, current rating

Dimensions

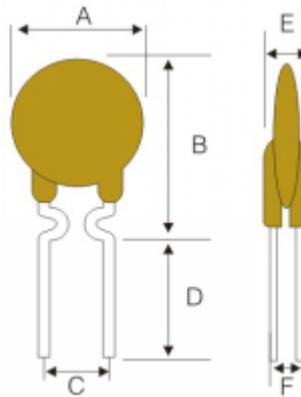

Part Number	Dimensions (mm)					Lead Material
	A (Max)	B (Max)	C (Typ)	D (Min)	E (Max)	Tinned Metal (mm)
SC30-075CW0D	7.5	13.0	5.1	7.6	3.0	Φ 0.50

Packaging Quantity

Part Number	Quantity (pcs/bag)
SC30-075CW0D	1000